



Biopad100

Time & Attendance
Biometric Fingerprint Device



Features

Standard Features

- Reliable ZK optical sensor
- Stores 6,000 templates
- 3-inch colour TFT screen for easy navigation
- Less than 1 second user recognition
- Stores 300,000 transactions
- USB port for manual data transfers
- Reads Fingerprint and/or Pin's

Enhanced Features

- SDK Available for development
- Work codes
- TCP/IP
- Integrated RFID proximity reader

Software

- ZK Time 5.0 Attendance Management (Basic Free)
- ZKTime.net (Advanced Licenced)

Related Products



ZK4500



RFID Cards & Tags

Alternative Products



T5-C



DS100



U160-C




X628

Specifications

- Fingerprint Capacity: 6,000 templates
- Transaction Capacity: 300,000 transactions
- RFID Card Capacity: 10,000 cards
- Sensor: ZK Optical Sensor
- Algorithm Version: ZK Finger v10.0
- Built-in Card Reader: 125kHz RFID proximity reader
- Communication: TCP/IP, USB-host
- Standard Functions: Work codes
- Optional Functions: SDK for development
- Power Supply: 12V DC 3A
- Operating Temperature: 0 °C - 45 °C
- Operating Humidity: 20% - 80%
- Dimension: 222 x 135 x 49mm

Dimensions

Configuration

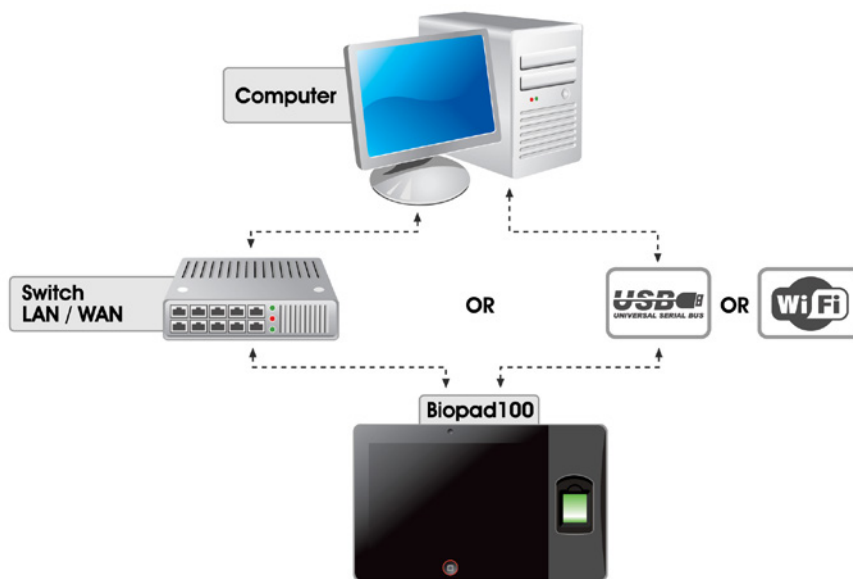

ZKTeco, ZKSoftware, ZKAccess, ZKIVision, ZKBioblock, ZKAFIS are either registered trademarks or trademarks of ZKTECO INC and ZKTeco South Africa.

You must obtain written and signed permission from ZKTECO before using any photograph owned or licenced by ZKTECO.

Copyright © 1998-2014 ZKTECO INC. All rights reserved.