



F6

Access Control
Biometric Fingerprint Device



Features

Standard Features

- Slim & Elegant design
- Built-in SD card reader for manual data transfer
- Stores 500 fingerprint templates
- Stores 5000 cards & 30,000 transactions
- Less than 1 second recognition
- Reads Fingerprint and/or RFID card

Enhanced Features

- Audio - Visual indications for valid / invalid entries
- Supports 50 time zones, 5 groups and 10 combinations
- Tamper switch
- Integrated 125kHz RFID proximity reader

Software

- ZK Access Control Management 3.5(manual import)

Related Products



RFID Cards



Exit Button



Maglocks



ZK4500



Mini UPS




F12-Slave


Specifications

- Fingerprint Capacity: 500 templates
- Card Capacity: 5,000 templates
- Transaction Capacity: 30,000 transactions
- Built-in Card Reader: 125kHz RFID proximity reader
- Communication: RS485, SD card
- Access Control interfaces: 3rd party electric lock, door sensor, exit button, door alarm
- Access Control functions: Standalone
- Power Supply: 12V DC 3A
- Operating Temperature: 0 °C - 45 °C
- Operating Humidity: 20% - 80%
- Dimension: 68 X 155 X 38mm

Dimensions

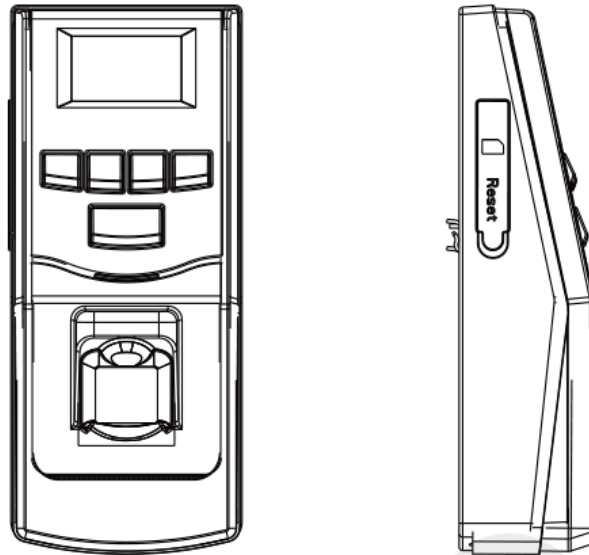

Configuration

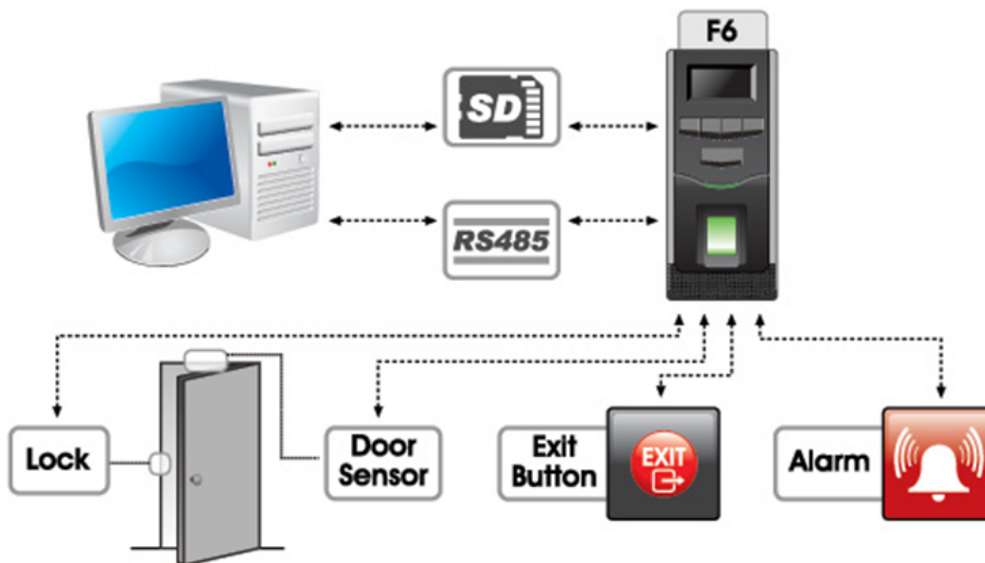

ZKTeco, ZKSoftware, ZKAccess, ZKIVision, ZKBioblock, ZKAFIS are either registered trademarks or trademarks of ZKTECO INC and ZKTeco South Africa.

You must obtain written and signed permission from ZKTECO before using any photograph owned or licenced by ZKTECO.

Copyright © 1998-2014 ZKTECO INC. All rights reserved.