



F707

Access Control
Biometric Fingerprint Device



Features

Standard Features

- Slim & Elegant design
- Less than 1 second recognition
- Stores 2200 fingerprint templates
- Stores 50,000 transactions
- Anti-Passback function (with F12 Slave)
- Built-in Wiegand Output
- TCP/IP Communication

Enhanced Features

- Audio - Visual indications for valid / invalid entries
- Supports 50 time zones, 5 groups and 10 combinations
- Tamper switch
- Work Codes

Software

- ZK Access Control Management 3.5
- ZKTime.net (T&A)

Related Products



ZK4500



Exit Button



Maglocks



F12 Slave

Alternative Products



F708




F7


Specifications

- Fingerprint Capacity: 2,200 templates
- Transaction Capacity: 50,000 transactions
- Sensor: ZK Optical
- Communication: RS232/485, TCP/IP
- Access Control interfaces: 3rd party electric lock, door sensor, exit button, door alarm
- Access Control functions: Anti-pass back (with F12 Slave)
- Power Supply: 12V DC 3A
- Operating Temperature: 0 °C - 45 °C
- Operating Humidity: 20% - 80%
- Dimension: 90 X 190 X 39mm

Dimensions

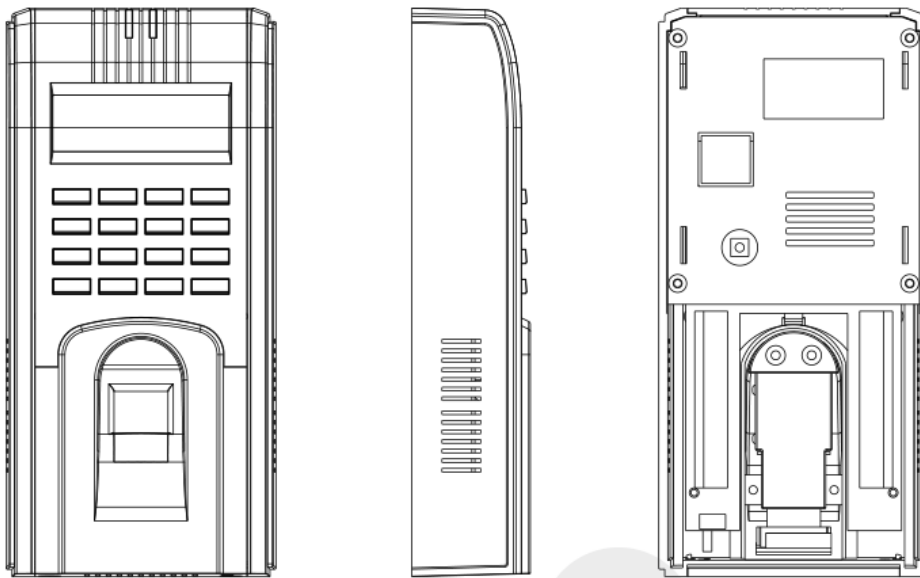

Configuration

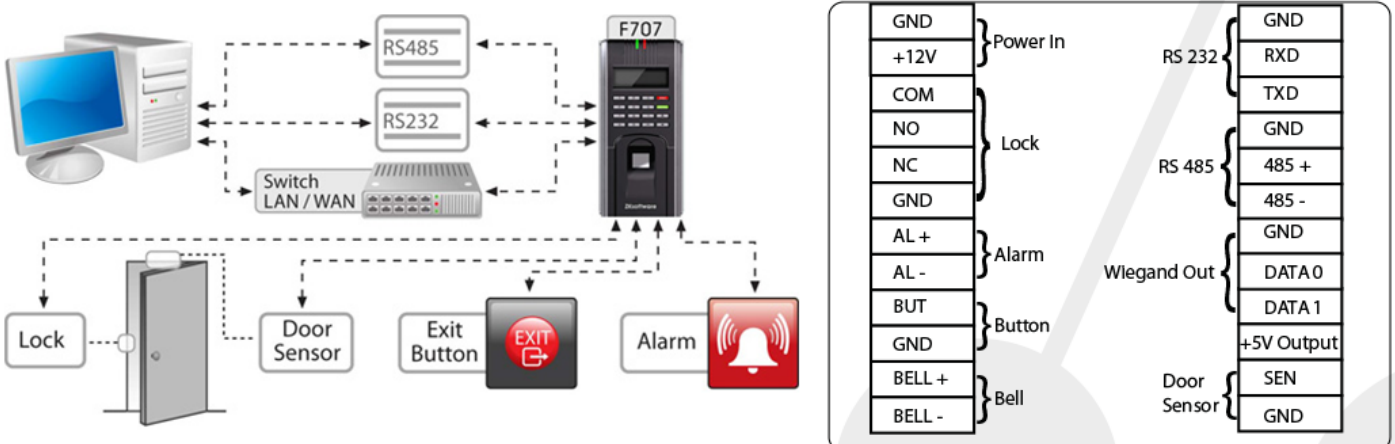

ZKTeco, ZKSoftware, ZKAccess, ZKIVision, ZKBioblock, ZKAFIS are either registered trademarks or trademarks of ZKTECO INC and ZKTeco South Africa.

You must obtain written and signed permission from ZKTECO before using any photograph owned or licenced by ZKTECO.

Copyright © 1998-2014 ZKTECO INC. All rights reserved.